

Laguna State Polytechnic University

ITEP 414 - System Administration and Maintenance

Professional Installation Manual

Enterprise Server Deployment and Operating System Installation

Student: Cedrick Gayoso

Program: BSIT

Section: BSIT-4E

Week: 3

Date Completed: 15 August 2026

Table of Contents


1. Introduction
2. Ubuntu Server Installation Guide
3. Initial Server Configuration
4. Server Verification Procedures
5. Windows Server Evaluation
6. Troubleshooting Guide
7. Best Practices
8. References

1. Introduction


This manual provides a reproducible procedure for deploying the Week 3 Ubuntu Server VM and completing the Windows Server Evaluation activity.

2. Ubuntu Server Installation Guide


1. Create Ubuntu-Server-Week03 with 4096 MB RAM, 2 CPUs, a 40 GB dynamically allocated VDI, NAT, and the Ubuntu Server ISO.
2. Select English and the standard Ubuntu Server installation.
3. Select English (US) keyboard layout.
4. Accept DHCP and record the assigned IP.
5. Use Guided - Use Entire Disk and retain LVM.
6. Set hostname server01 and create non-root administrative user sedo.
7. Enable Install OpenSSH server.
8. Do not select additional packages unless required.
9. Complete installation, reboot, and remove the installation ISO when prompted.

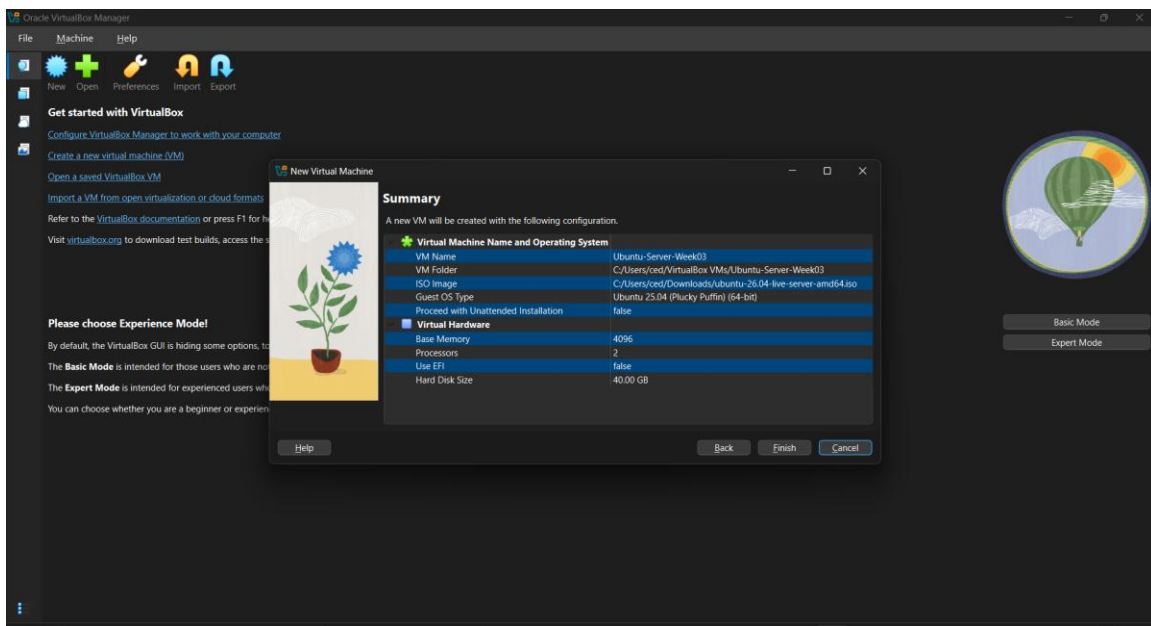


VM settings

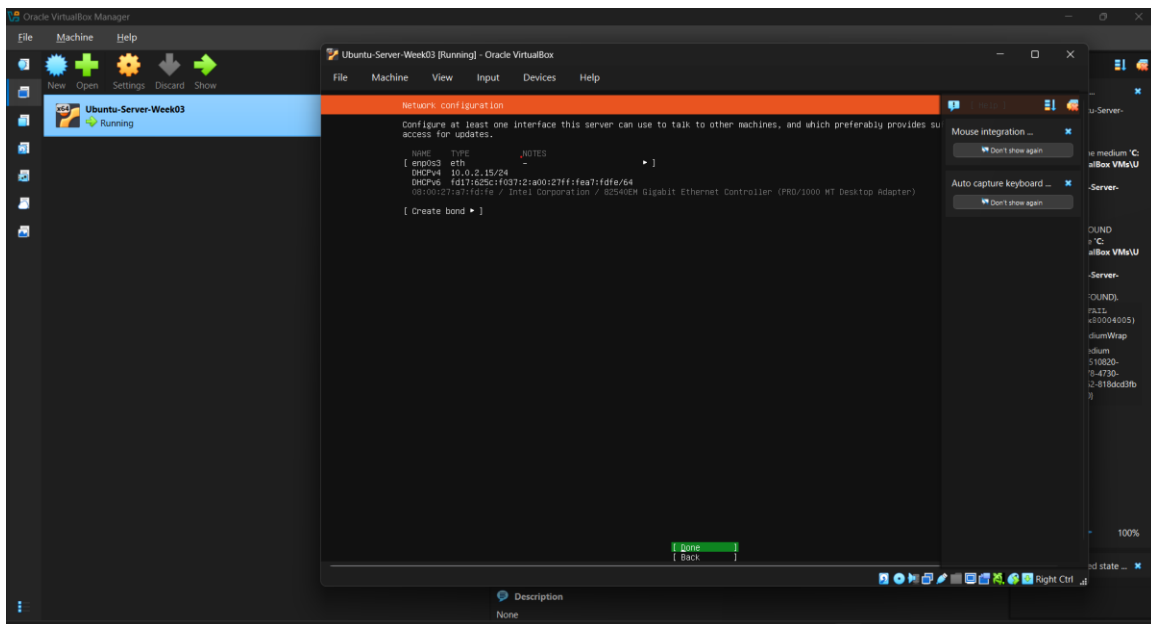

DHCP networking

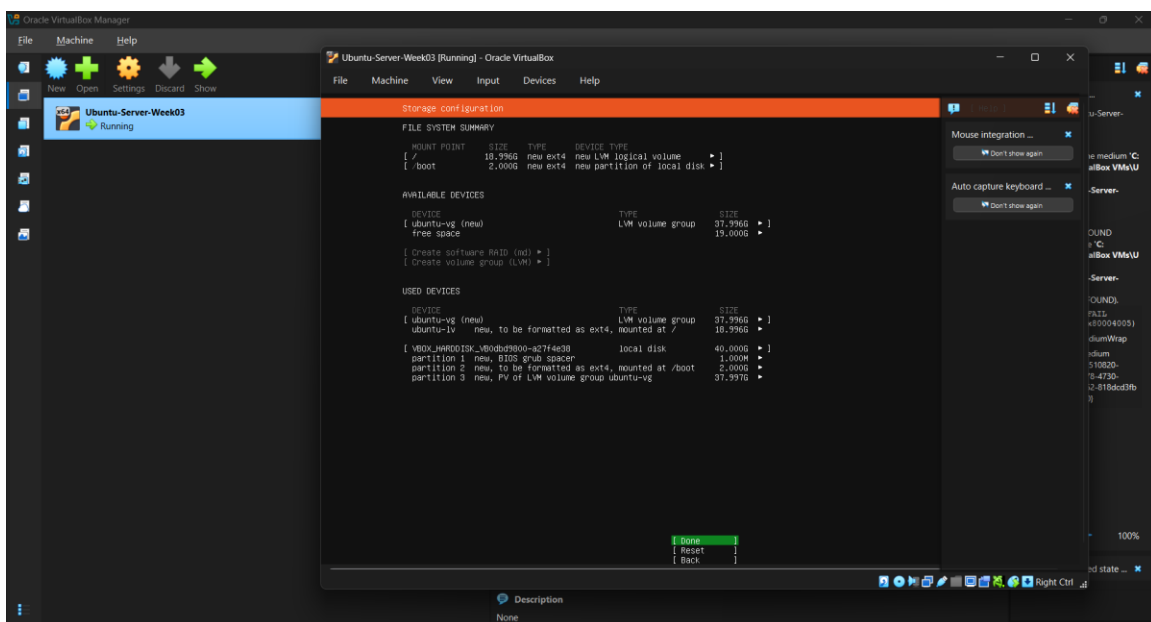

Storage summary

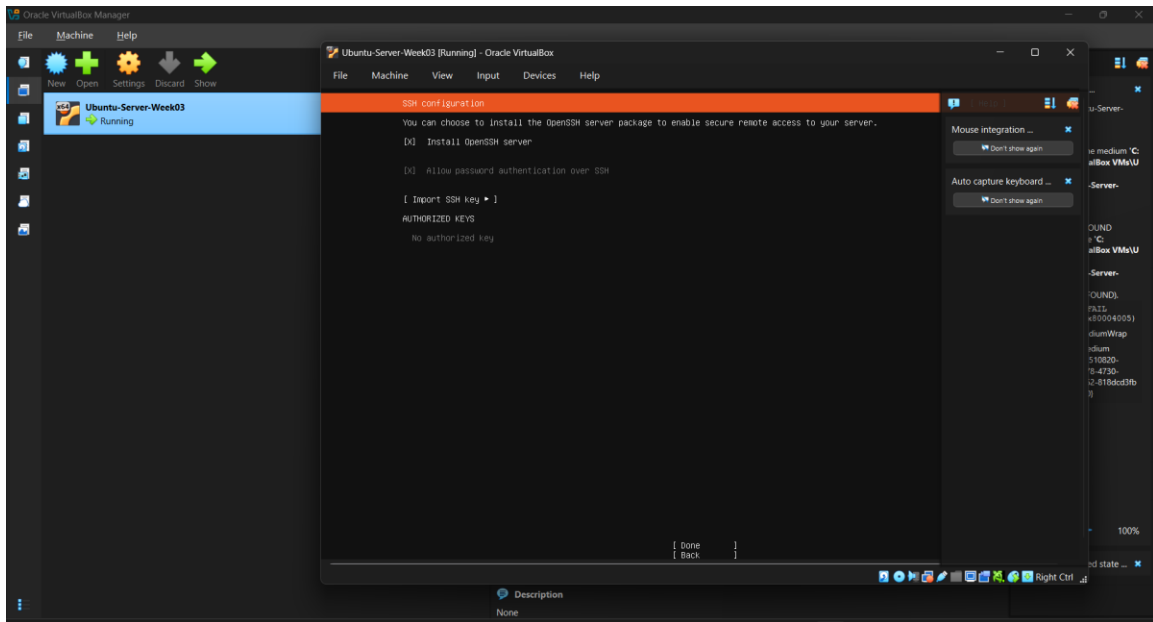

OpenSSH enabled

3. Initial Server Configuration

Item	Value
Hostname	server01
User	sedo
IPv4	10.0.2.15/24
Network	NAT/DHCP
Disk	40 GB VDI with LVM
SSH	OpenSSH installed


4. Server Verification Procedures

Command	Expected Result
hostname	server01
ip addr	10.0.2.15/24 on enp0s3
ping -c 4 google.com	4 replies, 0% loss
sudo apt update	Repository metadata refresh completes
sudo apt upgrade -y	Updates installed
systemctl status ssh	active (running)


5. Windows Server Evaluation

10. Create a separate VM with 4 GB RAM, 2 CPUs, a 50 GB VDI, NAT, and Windows Server Evaluation ISO.

11. Install Windows Server 2025 Standard Evaluation (Desktop Experience).
12. Create the built-in Administrator password and log in.
13. Rename the computer to winserver01 and restart.
14. Verify the final computer name in Server Manager -> Local Server.

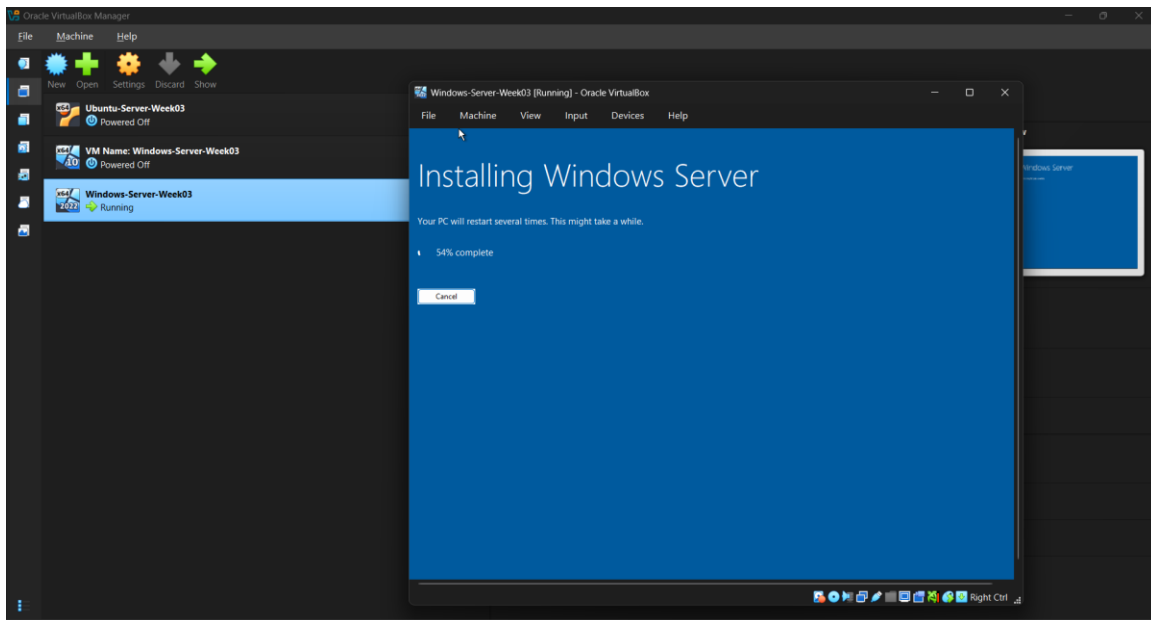

Windows Server installation

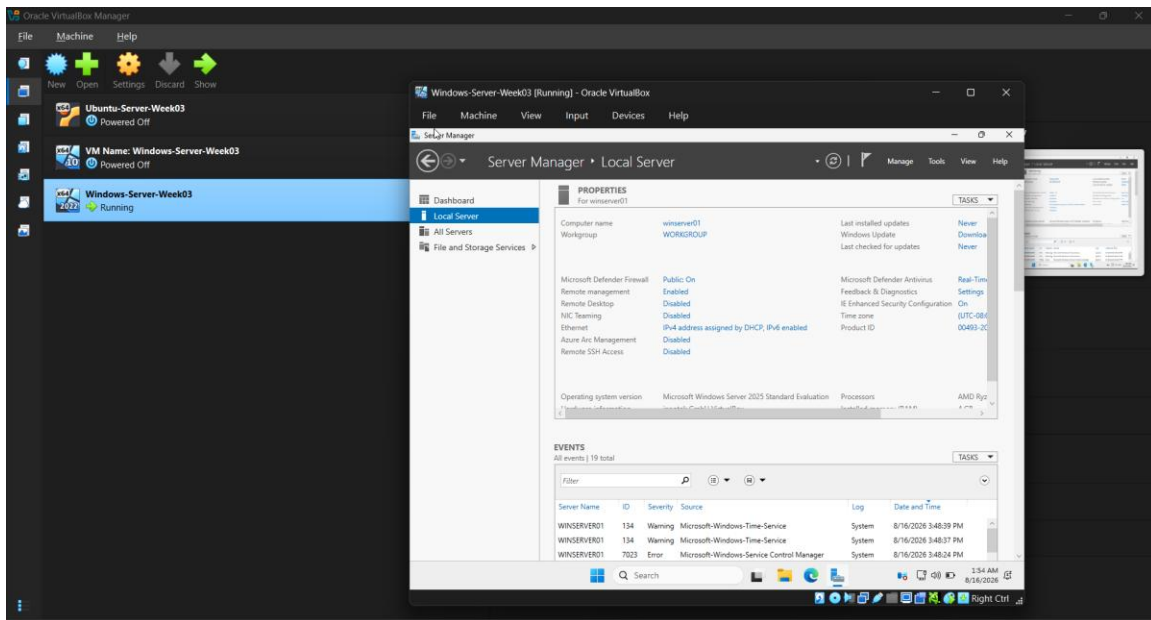

Final Windows Server state

6. Troubleshooting Guide

Symptom	Likely Cause	Action
VDI already exists / UUID conflict	Duplicate disk registration	Use the intended disk; do not create another duplicate medium.
VERR_FILE_NOT_FOUND	Invalid disk path	Power off and repair storage attachment.
APT 403 Forbidden	Mirror/repository issue	Run apt update, verify URIs, switch to reliable main archive, retry.
systemctl not found	Typo	Use systemctl with lowercase l.
BLKCACHE_IOERR / VM pauses	Host cannot complete VDI writes, often low free space	Free host storage without deleting the VDI, then resume/reset if needed.

7. Best Practices

- Maintain adequate free host storage before large VM installations.
- Use clear VM/disk names and avoid duplicate media.
- Use non-root Linux accounts with sudo.
- Protect SSH with strong authentication and keep services updated.
- Keep passwords out of screenshots and public repositories.
- Retain editable source files alongside final PDFs.

8. References

- Oracle VirtualBox User Manual.
- Ubuntu Server documentation.
- Microsoft Windows Server documentation.
- OpenSSH documentation.
- UEFI Forum documentation.
- Rocky Linux documentation.